



Characteristics

Enclosure manufactured from 1.5mm sheet steel.
 Door manufactured from 1.5mm sheet steel up to 800mm height then 2mm sheet steel.
 Mounting plate manufactured from 2.5mm sendzimir sheet steel.
 3mm transparent plexiglas sheet.

Paint finish

CE-TEK standard epoxy polyester powder coating.
 Enclosure and door RAL 7032 textured finish.

Supply includes



- box
- mounting plate
- gland plate with sealing gasket
- ø 3mm double bar key
- screws for earthing
- mounting accessories.

Conformity and approval



Protection degree

- IP 55 complying with EN50298; EN60529
- type 12 complying with UL508A; UL50
- impact resistance IK10 complying with EN500298; EN50102.

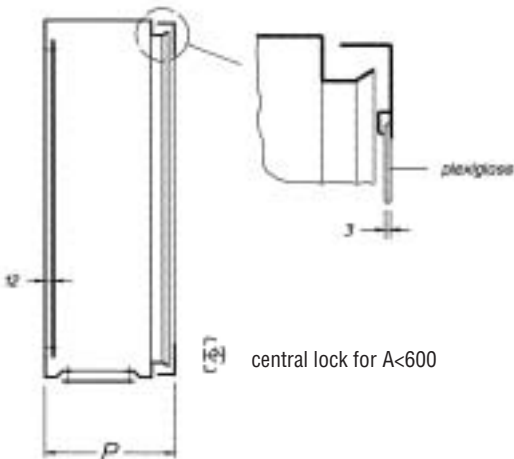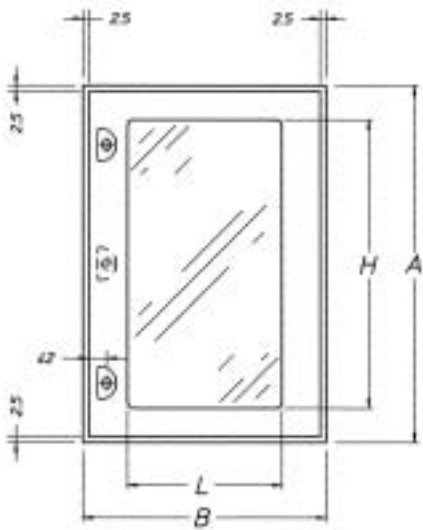

code		B	A	L	H	P
mod.	art.					
	320	400	300	260	185	200
CESTP4	420	400	400	260	285	200
CESTP4	520	400	500	260	385	200
CESTP4	525	400	500	260	385	250
CESTP4	620	400	600	260	485	200
CESTP4	625	400	600	260	485	250
CESTP5	720	500	700	360	585	200
CESTP5	725	500	700	360	585	250
CESTP6	420	600	400	460	285	200
CESTP6	430	600	400	460	285	300
CESTP6	620	600	600	460	485	200
CESTP6	630	600	600	460	485	300
CESTP6	825	600	800	460	685	250
CESTP6	830	600	800	460	685	300
CESTP6	1025	600	1000	460	885	250
CESTP6	1030	600	1000	460	885	300
CESTP6	1230	600	1200	460	1085	300
CESTP8	1030	800	1000	660	885	300
CESTP8	1230	800	1200	660	1085	300